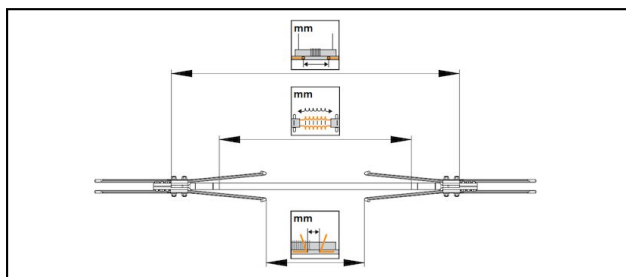
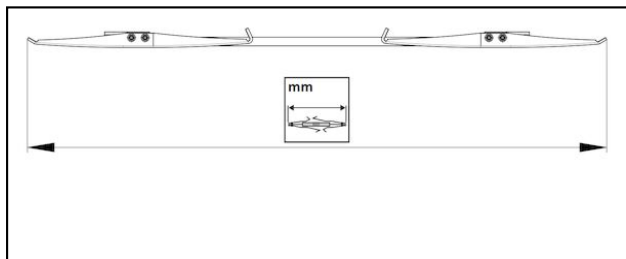


Up to 3 kV

■ **LTN3** Neutral section**Application**

Neutral section to separate different electrical phases or systems
For tramway and light rail
Maximum speed up to 60 km/h

Characteristics

Suspension is not necessary (optionally available)

Material

GRP/PTFE, Cu, CuNiSi, stainless steel

Legend

- 1) For 1 contact wire system
- 2) For 2 contact wire system

Article-Nr.									
655.266.050	700	1050	357	1610	320	max.24		5.8	1

Accessories**Suspension for LT1 625.000.001**

Article-Nr.									
625.000.001								0.43	

Technical Specifications: **Neutral section LTN3**

Article No.	655.266.050
Contact wire section	80 - 150 mm ²
Contact wire groove	5.6 mm
Creeping distance	700 mm
Length between contact wire	1050 mm
Arcing horn distance	357 mm
Total length	1610 mm
Width between suspension	320 mm
Recommended service load	max.24
Specified mechanical load (SML)	80 kN
comment	1
Commercial specification	
Customs number	0
country of origin	undefined
Texte	
comment	1
Logistic specification	
Kilo / piece	5.8 kg

