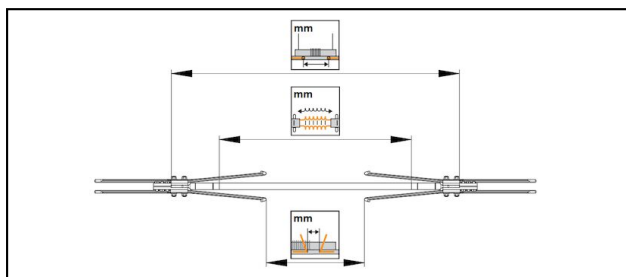
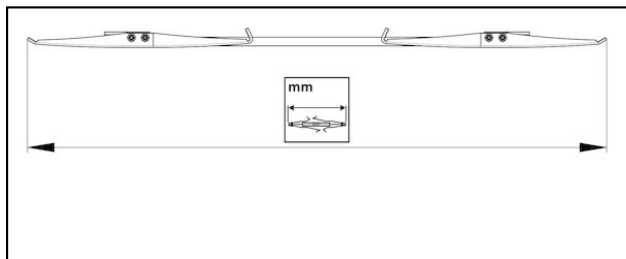


Up to 3 kV

■ **LTN3** Neutral section**Application**

Neutral section to separate different electrical phases or systems
For tramway and light rail
Maximum speed up to 60 km/h

Characteristics

Suspension is not necessary (optionally available)

Material

GRP/PTFE, Cu, CuNiSi, stainless steel

Legend

- 1) For 1 contact wire system
- 2) For 2 contact wire system

Article-Nr.									
655.266.053	1143	1494	800	2050	320	max.24		6.4	1

Accessories**Suspension for LT1 625.000.001**

Article-Nr.									
625.000.001								0.43	

Technical Specifications: **Neutral section LTN3**

Article No.	655.266.053
Contact wire section	80 - 150 mm ²
Contact wire groove	5.6 mm
Creeping distance	1143 mm
Length between contact wire	1494 mm
Arcing horn distance	800 mm
Total length	2050 mm
Width between suspension	320 mm
Recommended service load	max.24
Specified mechanical load (SML)	80 kN
comment	1
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	6.4 kg

