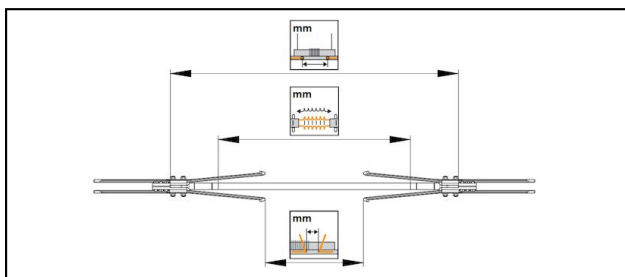
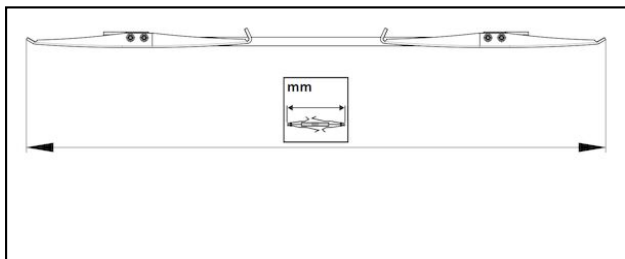


Up to 3 kV

■ **LTN3** Neutral section**Application**

Neutral section to separate different electrical phases or systems
For tramway and light rail
Maximum speed up to 60 km/h

Characteristics

Suspension is not necessary (optionally available)

Material

GRP/PTFE, Cu, CuNiSi, stainless steel

Legend

- 1) For 1 contact wire system
- 2) For 2 contact wire system

Article-Nr.									
655.266.055	955	1305	610	1864	320	max.24		6.2	1

Accessories**Suspension for LT1 625.000.001**

Article-Nr.									
625.000.001								0.43	

Technical Specifications: **Neutral section LTN3**

Article No.	655.266.055
Contact wire section	120 - 177 mm ²
Contact wire groove	6.9 mm
Creeping distance	955 mm
Length between contact wire	1305 mm
Arcing horn distance	610 mm
Total length	1864 mm
Width between suspension	320 mm
Recommended service load	max.24
Specified mechanical load (SML)	80 kN
comment	1
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	6.2 kg

