


Cable droppers

■ **SHTF5,2/10V** Non- current feeding, adjustable

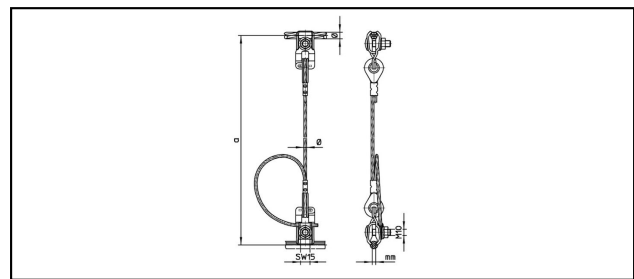

Application
Suspension for contact wire, non-current feeding

Characteristics
Other length and contact wire groove on request

Material
Clamp CuNiSi / stainless steel / Cable Bz 2 / Thimble plastics

Article-Nr.									
625.590.100	9 - 13	50 - 95	5.5 - 7	4.5	10	3	300 - 2800		0.392

Technical Specifications: **Non- current feeding, adjustable SHTF5,2/10V**

Article No.	625.590.100
Catenary wire diameter	9 - 13 mm
Catenary wire section	50 - 95 mm²
Contact wire groove	5.5 - 7 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm²
Slipping force	3 kN
Length a	300 - 2800 mm
Commercial specification	
Customs number	0
country of origin	undefined
Logistic specification	
Kilo / piece	0.392 kg

