


Foundation earthing components

■ FE 44 Parallel and cross connector

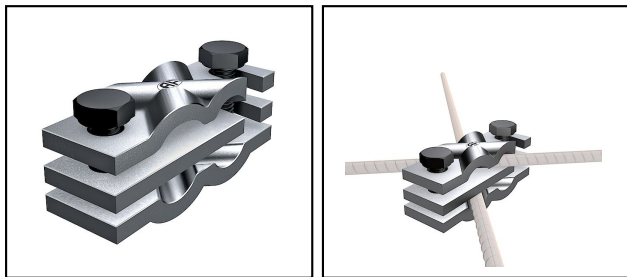

Article-Nr.	E-Number									
281.097.000	156 940 150			St	M10x60	6 - 22	30x3			25
281.107.000	156 940 580			St	M10x100	6 - 26	30x3			25
281.098.000	156 940 160			St	M10x60	6 - 22	50x3			25
281.098.010	156 940 760			St	M10x100	6 - 26	50x3			15
280.000.001	156 940 280	H	ok	InoxA4	M10x60	6 - 22	30x3			25
280.000.003	156 940 790	H	ok	InoxA4	M10x60	6 - 22	50x3			25

Technical Specifications: **Parallel and cross connector FE 44**

	281.097.000	281.107.000	281.098.000	281.098.010
Approved class H / N (EN 62561-1)				
Suitable for use in soil				
Material	St			
Screw	M10x60	M10x100	M10x60	M10x100
Wire diameter	6 - 22 mm	6 - 26 mm	6 - 22 mm	6 - 26 mm
Band size	30x3 mm		50x3 mm	
Type of fastening screws	Hexagon screw			
Surface protection	unbehandelt			
Type of connector	Access-clip			
Suitable for diameter round conductor	6 - 22 mm	6 - 26 mm	6 - 22 mm	6 - 26 mm
required torque	25 N·m			
Commercial specification				
Customs number	85389000			85359000
country of origin	CH			
Logistic specification				
VPE Weight	6.685 kg	11.7 kg	17.4 kg	18.5 kg

	280.000.001		280.000.003	
Approved class H / N (EN 62561-1)	H			
Suitable for use in soil	ok			
Material	InoxA4			
Screw	M10x60			
Wire diameter	6 - 22 mm			
Band size	30x3 mm		50x3 mm	
Type of fastening screws	Hexagon screw			
Surface protection	unbehandelt			
Type of connector	Access-clip			
Suitable for diameter round conductor	6 - 22 mm			
required torque	25 N·m			
Commercial specification				
Customs number	85389000			
country of origin	CH			
Logistic specification				
VPE Weight	10.63 kg		17.7 kg	