


Ring earthing components

RE 35 Pipe and contact clip

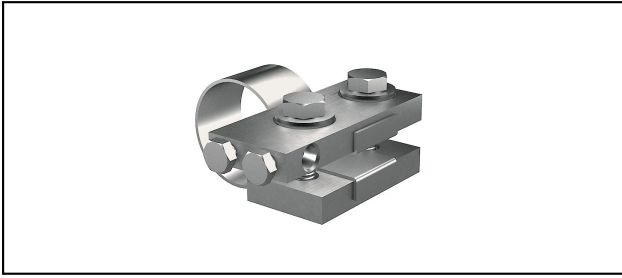

Characteristics

Turnbuckles M10x40

Article-Nr.	E-Number									
260.013.204	156 832 600	ok	InoxA4	max.9	20	3/4"	25.9 - 27.9	M10x40		1
260.014.205	156 832 610	ok	InoxA4	max.9	25	1"	32.7 - 34.7	M10x40		1
260.015.206	156 832 620	ok	InoxA4	max.9	32	1 1/4"	41.2 - 43.2	M10x40		1
260.016.207	156 832 630	ok	InoxA4	max.9	40	1 1/2"	47.3 - 49.3	M10x40		1
260.017.208	156 832 640	ok	InoxA4	max.9	50	2"	59.3 - 61.3	M10x40		1
260.018.209	156 832 650	ok	InoxA4	max.9	65	2 1/2"	75.1 - 77.1	M10x40		1
260.019.210	156 832 660	ok	InoxA4	max.9	80	3"	87.9 - 89.9	M10x40		1
260.020.022	156 832 420	ok	InoxA4	max.9	40 spez		52.4 - 54.4	M10x40		1
260.021.072	156 832 430	ok	InoxA4	max.9	50 spez		61.7 - 63.7	M10x40		1
260.022.034	156 832 440	ok	InoxA4	max.9	60 spez		73 - 75	M10x40		1
260.023.073	156 832 450	ok	InoxA4	max.9	70 spez		83.4 - 85.4	M10x40		1
260.024.074	156 832 460	ok	InoxA4	max.9	80 spez		94.5 - 96.5	M10x40		1
260.025.075	156 832 470	ok	InoxA4	max.9	90 spez		103 - 105	M10x40		1

Technical Specifications: Pipe and contact clip RE 35

	260.013.204	260.014.205	260.015.206	260.016.207
Suitable for use in soil	ok			
Material	InoxA4			
Wire diameter	max.9 mm			
Nominal width	20	25	32	40
Nominal width	3/4" Zoll	1" Zoll	1 1/4" Zoll	1 1/2" Zoll
Clamping range pipe diameter	25.9 - 27.9 mm	32.7 - 34.7 mm	41.2 - 43.2 mm	47.3 - 49.3 mm
Clamping range inch	3/4 inch	1 inch	1 1/4 inch	1 1/2 inch
Cross section of the connecting conductors	50 mm ²			
Screw	M10x40			
Surface protection	unbehandelt			
Clamping/chucking range	25.9 - 27.9 mm	32.7 - 34.7 mm	41.2 - 43.2 mm	47.3 - 49.3 mm
Number of conductors	1			
required torque	12 N·m			
Commercial specification				
Customs number	85389000			
country of origin	CH			
Logistic specification				
VPE Weight	0.745 kg	0.753 kg	0.76 kg	0.768 kg

	260.017.208	260.018.209	260.019.210	260.020.022
Suitable for use in soil	ok			
Material	InoxA4			
Wire diameter	max.9 mm			
Nominal width	50	65	80	40 spez
Nominal width	2" Zoll	2 1/2" Zoll	3" Zoll	
Clamping range pipe diameter	59.3 - 61.3 mm	75.1 - 77.1 mm	87.9 - 89.9 mm	52.4 - 54.4 mm
Clamping range inch	2 inch	2 1/2 inch	3 inch	1 1/2 inch
Cross section of the connecting conductors	50 mm ²			
Screw	M10x40			
Surface protection	unbehandelt			
Clamping/chucking range	59.3 - 61.3 mm	75.1 - 77.1 mm	87.9 - 89.9 mm	52.4 - 54.4 mm
Number of conductors	1			
required torque	12 N·m			25 N·m
Commercial specification				
Customs number	85389000			
country of origin	CH			
Logistic specification				
VPE Weight	0.784 kg	0.795 kg	0.812 kg	0.769 kg

	260.021.072	260.022.034	260.023.073	260.024.074
Suitable for use in soil	ok			
Material	InoxA4			
Wire diameter	max.9 mm			
Nominal width	50 spez	60 spez	70 spez	80 spez
Nominal width				
Clamping range pipe diameter	61.7 - 63.7 mm	73 - 75 mm	83.4 - 85.4 mm	94.5 - 96.5 mm
Clamping range inch	2 inch		3 inch	
Cross section of the connecting conductors	50 mm²			
Screw	M10x40			
Surface protection	unbehandelt			
Clamping/chucking range	61.7 - 63.7 mm	73 - 75 mm	83.4 - 85.4 mm	94.5 - 96.5 mm
Number of conductors	1			
required torque	12 N·m			
Commercial specification				
Customs number	85389000			
country of origin	CH			
Logistic specification				
VPE Weight	0.78 kg	0.798 kg	0.803 kg	0.819 kg



	260.025.075
Suitable for use in soil	ok
Material	InoxA4
Wire diameter	max.9 mm
Nominal width	90 spez
Nominal width	
Clamping range pipe diameter	103 - 105 mm
Clamping range inch	3 1/2 inch
Cross section of the connecting conductors	50 mm²
Screw	M10x40
Surface protection	unbehandelt
Clamping/chucking range	103 - 105 mm
Number of conductors	1
required torque	12 N·m
Commercial specification	
Customs number	85389000
country of origin	CH
Logistic specification	
VPE Weight	0.83 kg

