


Safety hock without perforation

■ DH 1 Z Roof safety hook

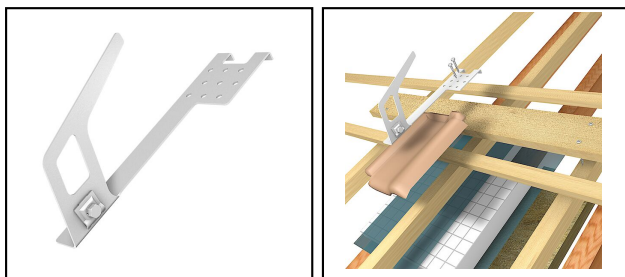

Characteristics

Roof safety hook curved made of Inox A2, for mounting with a drawboard

no penetration of the roof skin through the screw connections

incl. connection for the H-tested integration in lightning protection

Promotion: buy 10 get one free !

Article-Nr.	E-Number									
310.002.003		H	Inox A2	1						10

Accessories



Plat head screw 380.000.096

Article-Nr.	E-Number									
380.000.096		InoxA2	D. 8x80							50

Accessories



Plat head screw 380.000.097

Article-Nr.	E-Number									
380.000.097		InoxA2	D. 8x100							100

Accessories



Connection plate and screw 285.099.025

Article-Nr.	E-Number									
285.099.025	156 831 650	H	ok	InoxA4	M10x25	6 - 10				25

Accessories



Connection plate for 2 conductors with screw 260.071.002

Article-Nr.	E-Number									
260.071.002	156 831 660	H	ok	InoxA4	M10x25	6 - 10			a)	10

Technical Specifications: **Roof safety hook DH 1 Z**

Article No.	310.002.003
Approved class H / N (EN 62561-1)	H
Number of person	1
Material	Inox A2
Standards	
Test standards Europe	EN 517 Typ B
Commercial specification	
Customs number	73089000
country of origin	CH
Logistic specification	
VPE Weight	8.1 kg

