


Conductor connections and junctions

■ AV 22 Sheet metal connector

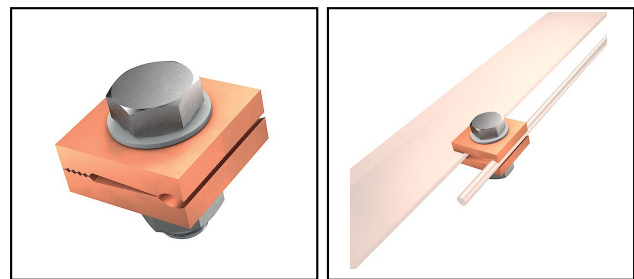

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|
| 275.041.025 | 156 831 460 | H                                                                                 | Cu                                                                                | M10x30                                                                            | 6 - 8                                                                             | 1 - 3                                                                             |  |  |  | 50                                                                                  |

Technical Specifications: **Sheet metal connector AV 22**

|                                   |               |
|-----------------------------------|---------------|
|                                   | 275.041.025   |
| Approved class H / N (EN 62561-1) | H             |
| Material                          | Cu            |
| Screw                             | M10x30        |
| Wire diameter                     | 6 - 8 mm      |
| Type of fastening screws          | Hexagon screw |
| Clamping range flat               | 1 - 3 mm      |
| Type of connector                 | Rebate clamp  |
| required torque                   | 25 N·m        |
| Surface protection                | unbehandelt   |
| Commercial specification          |               |
| Customs number                    | 85389000      |
| country of origin                 | CE            |
| Logistic specification            |               |
| VPE Weight                        | 5.86 kg       |

