


Conductor material flat

■ **LF 2** Strip

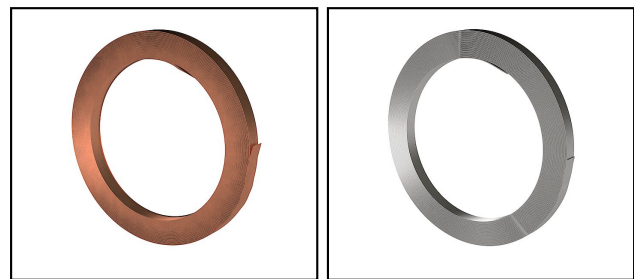

**Characteristics**  
Price on application (current daily price)

**Legend**  
a) Hot-galvanized 225gr/m2  
b) Hot-galvanized 500gr/m2, use under reserve in the ground

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 265.072.000 | 100 779 450 | ok                                                                                | Cu                                                                                | 50x4                                                                              | 200                                                                               |  |  |                                                                                     | 17                                                                                  | 30                                                                                  |



Technical Specifications: **Strip LF 2**

|                          |                     |
|--------------------------|---------------------|
| Article No.              | 265.072.000         |
| Suitable for use in soil | ok                  |
| Material                 | Cu                  |
| Band size                | 50x4                |
| Band section             | 200 mm <sup>2</sup> |
| Cross section            | 200 mm <sup>2</sup> |
| Surface protection       | unbehandelt         |
| Thickness                | 4 mm                |
| Commercial specification |                     |
| Customs number           | 74091100            |
| country of origin        | undefined           |
| Logistic specification   |                     |
| VPE Weight               | 30 kg               |

