


Informatics, Telecommunication

DLU 2 Surge protection

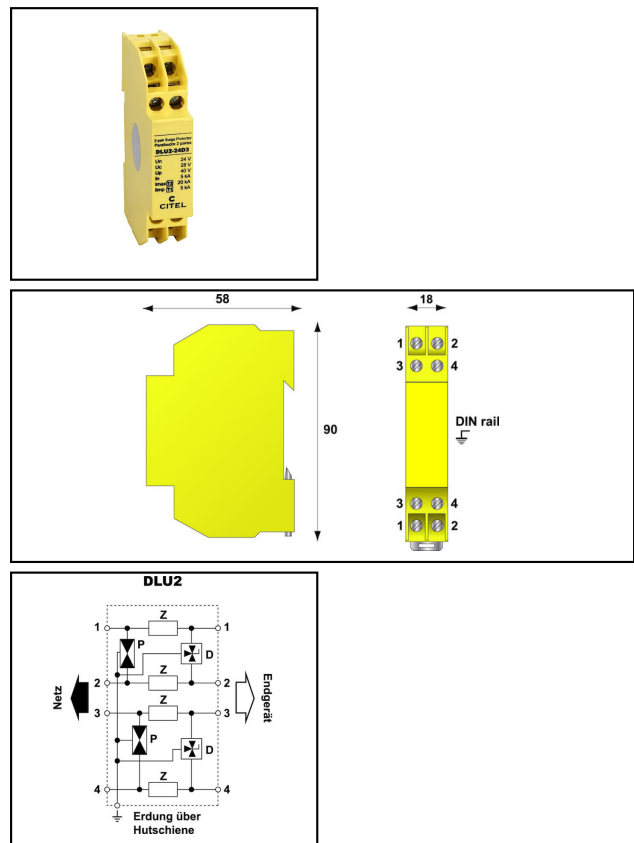

Characteristics
Designed to protect, against surge voltages due to lightning, telecom lines. Based on gas-tube tecnology with fast switching diodes.

Article-Nr.	E-Number		V U_N	ns t_A	kV U_P	kA I_{max}	mm² 			 VE Emb.
296.074.266	970 531 003	4	48	≤1	0.07	20	0.75 - 1.5			1

Technical Specifications: **Surge protection DLU 2**

Article No.	296.074.266
Nominal voltage Un	48
Number of wires	4
Operating voltage max. [UcDC]	53 V
Nominal line voltage Un AC	48 V
Nominal line voltage Un DC	48 V
Continuous voltage AC max.	37 V
Continuous voltage DC max.	53 V
Applications with interface	48 V Analoges Telefon ADSL RNIS-T0 Profibus PA
Nominal discharge surge current (8/20)	5 kA
Nominal load current	0.3 A
Voltage protection level [Up]	0.07 kV
Response time [ta]	≤1
Fault indication	Kurzschluss
Temperature range	-40 - 85 °C
Degree of protection	IP20
Dimensions	Siehe Massbild
Signaling on the device	None
Connection cross section solid / stranded max.	1.5 mm²
Nominal cross section conductor	0.75 - 1.5 mm²
Signal nominal load current	0.3 A
Nominal discharge current [In]	5
Discharge current max. [Imax]	20 kA
Connector (information technology)	Clamp
Mounting method	DIN rail (top hat rail) 35 mm
With remote signalling contact	No
Signal - maximum continuous voltage AC	37 V
Standards	
Homologation	UL
Test standards International	IEC 61643-21
Test standards USA	UL 1449 ed.3
Commercial specification	
Customs number	85363000
country of origin	undefined
Logistic specification	
VPE Weight	0.079 kg