


Surge Protection (Type 1)

■ DS 250 VG Surge Protector

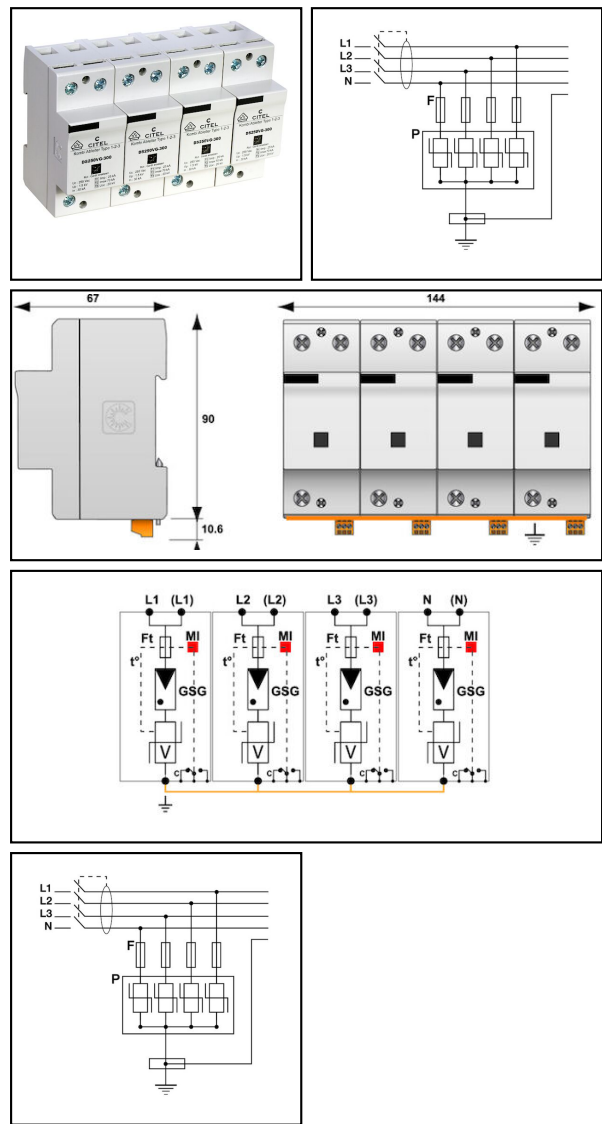

- Characteristics**
- surge protector type 1+2+3
 - 10 years warranty
 - limp = 25kA/pole (10/350µs)
 - optimized to TOV
 - internal disconnection, status indicator
 - follow and operating current: none
 - remote signaling

Article-Nr.	E-Number	Typ/Type		kA I_{imp}	kA I_{max}	ns t_A	kV U_P	kA i_n	mm²	
296.900.374	808 454 010	T1 / T2 / T3	4	25	70	≤20	1.5	30	6 - 50	Yes

Technical Specifications: Surge Protector DS 250 VG

Article No.	296.900.374
SPD type	T1 / T2 / T3
Number of poles	4
max. discharge current (I _{max})	70 kA
Nominal line voltage U _n AC	230 V
Continuous voltage AC max.	255 V
Nominal frequency [fn]	0 - 100 Hz
Impulse current [I _{imp}]_(10/350)	25 kA
Discharge current max. (8/20) μ s [I _{max}]	70 kA
Nominal discharge surge current (8/20)	30 kA
Combined shock [U _{oc}]	20 kV
Voltage protection level [Up]	1.5 kV
Protection level max. (at 5kA)	0.65 kV
Protection level max. (at 12.5kA)	0.8 kV
Protection level max. (at I _{max})	1.5 kV
Operating current [I _c]	0 kA
Follow current [IF]	0 kA
follow current extinguishing capability [Ifi]	Unendlich
Response time [ta]	≤20
TOV-voltage L-N [UT]	450 V / 5 sec.
TOV-voltage N-PE [UT]	1200 V / 200 ms / 300 A
TOV-voltage L-PE [UT]	1454 V / 200 ms / 300 A
Short circuit resistance (I _{cw})	25 kA
Fault indication	mechanisch, Rot
Temperature range	-40 - 85 °C
Degree of protection	IP20
Fuse max. (gG)	315 A
Mounting on	Hutschiene 35 mm
Material housing	Thermoplast PEI UL-94-5VA
Signaling on the device	Optic
Signaling contact	Yes
Connection cross section solid / stranded max.	1.5 mm ²
Switching capacity signaling contact	250 V/0,5 A (AC) / 125 V/0,25 A (DC)
System configuration	TN-S
Energetically coordinated protective effect to the terminal	Yes
Construction size	8 modular spacing
Exhausting	No
Network configuration	Yes
Nominal cross section conductor	6 - 50 mm ²
Voltage protection level L-N [Up]	1.5 kV
Mounting method	DIN rail (top hat rail) 35 mm
Degree of protection (IP)	IP20
Standards	
Homologation	UL
Test standards Europe	EN 61643-11
Test standards International	IEC 61643-11
Test standards USA	UL 1449 d.3
Commercial specification	
Customs number	85363000
country of origin	undefined
Logistic specification	
VPE Weight	1.18 kg

