


Suspension accessories

TSH1VK

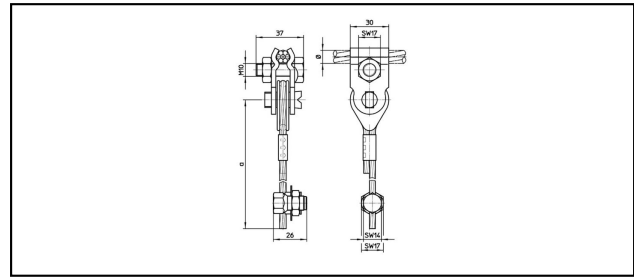

**Application**  
For the suspension of the section insulators with turnbuckles, clamp type FRL 7 and dropper clamp type SKTF1.

**Material**  
Dropper clamp CuNiSi  
Dropper wire BzII  
Clamp Ms90  
Thimble PA  
Compression sleeve Cu

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|
| 625.436.142 | 6.5 - 13                                                                          | 50 - 95                                                                           | 1800                                                                              | 10                                                                                | 1.5                                                                               |  |  |  | 0.34                                                                                |
| 625.435.142 | 6.5 - 13                                                                          | 50 - 95                                                                           | 3000                                                                              | 10                                                                                | 1.5                                                                               |  |  |  | 0.452                                                                               |
| 625.438.142 | 12.5 - 17.5                                                                       | 95 - 185                                                                          | 1800                                                                              | 10                                                                                | 1.5                                                                               |  |  |  | 0.35                                                                                |



Technical Specifications: **TSH1VK**

|                          |             |             |                |
|--------------------------|-------------|-------------|----------------|
|                          | 625.436.142 | 625.435.142 | 625.438.142    |
| Length a                 | 1800 mm     | 3000 mm     | 1800 mm        |
| Catenary wire diameter   | 6.5 - 13 mm |             | 12.5 - 17.5 mm |
| Catenary wire section    | 50 - 95 mm² |             | 95 - 185 mm²   |
| Dropper wire section     | 10 mm²      |             |                |
| Slipping force           | 1.5 kN      |             |                |
| Starting torque          | 20 N·m      |             |                |
| Commercial specification |             |             |                |
| Customs number           | 85359000    |             |                |
| country of origin        | CH          |             |                |
| Logistic specification   |             |             |                |
| Kilo / piece             | 0.34 kg     | 0.452 kg    | 0.35 kg        |

