


Magnetic earthing contact M170

Art. no. 640.100.300

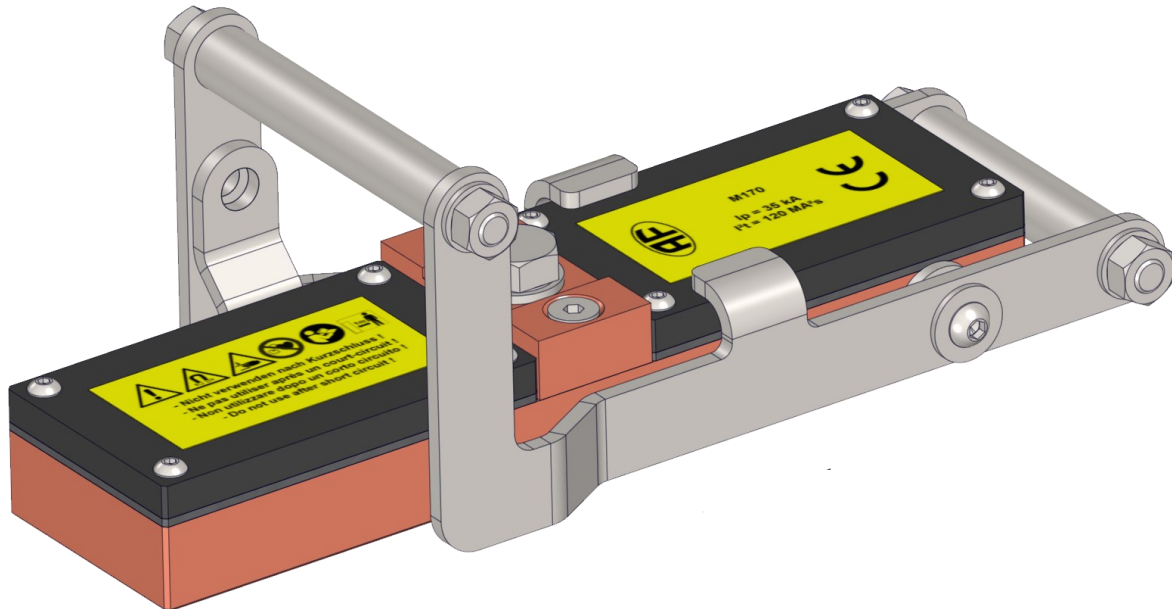

Application:

Earthing of railway overhead lines in AC and DC systems
Earthing of machines in the vicinity of live lines

Advantages:

- Large holding force
- Long service life due to protected magnets embedded in the body
- Simple and tool-free installation
- Secure attachment to the track
- Theft-proof design with padlock receptacle
- Flat and robust design

Technical specification:

Weight:	4,0 kg
Holding force magnet:	1'700 N
Short circuit current:	28 kA / 150 ms
Maximum peak current:	35 kA
Earthing connection:	Bolt M12