


Pendules à fil

DHF9H Pendule à fil avec pièce d'arrêt

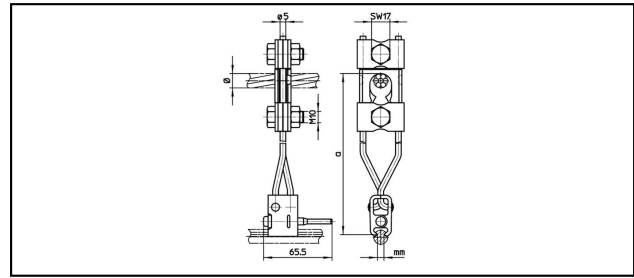

Application
Suspension pour fil de contact, non-équipotentiel

Description
Couple de serrage 12-15 Nm

Matériel
Corps CuNiSi / Cable Cu

Réf. article		 mm Ø	 mm	 kN	 mm a				 Kg
625.519.000		50 - 150	9 - 15.7	5.6	5	125 - 285			0.38
625.518.000		50 - 150	9 - 15.7	5.6	5	125 - 485			0.45
625.510.000		50 - 150	9 - 15.7	5.6	5	125 - 750			0.547
625.403.732		50 - 150	9 - 15.7	5.6	5	125 - 1500			0.81

Caractéristiques techniques: **Pendule à fil avec pièce d'arrêt DHF9H**

	625.519.000	625.518.000	625.510.000	625.403.732
Longueur a	125 - 285 mm	125 - 485 mm	125 - 750 mm	125 - 1500 mm
Section câble porteurs	50 - 150 mm²			
Diamètre câble porteur	9 - 15.7 mm			
Rainure du fil de contact	5.6 mm			
Force de glissade	5 kN			
Spécifications commerciales				
Numéro de tarif douanier	85359000			
pays d'origine	CH			
Spécifications logistiques				
Kilo / pièce	0.38 kg	0.45 kg	0.547 kg	0.81 kg