
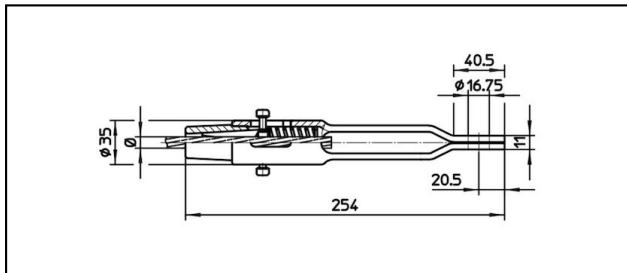


Connettore con occhio CuNiSi

■ OCL254

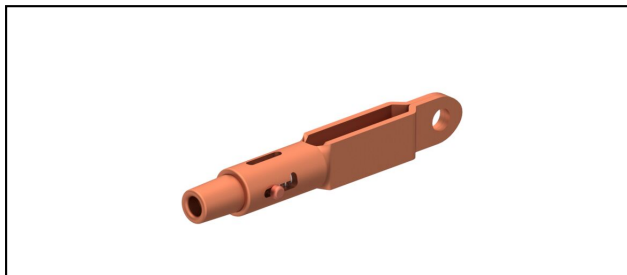

Applicazione

Conduttori in Cu, Cu-acciaio o Bz sottoposti a tiro meccanico

Caratteristiche

Carico di esercizio min. 3 kN / max. 25 kN

Carico di rottura del corpo min. 80 kN

Materiale

Corpo CuNiSi / Cono AIBz

Rif. Articolo									
615.225.000	D6	5.9	6						0.9
615.235.000	S35	7.5	35						0.91
615.193.102	S50	8.9	50						0.91
615.229.000	S70	10.8	70						0.91
615.194.104	S100	12	100						0.9

Specifiche tecnici: **OCL254**

	615.225.000	615.235.000	615.193.102	615.229.000
ferroviaria prodotto nome	D6	S35	S50	S70
Diametro funi portanti	5.9 mm	7.5 mm	8.9 mm	10.8 mm
Sezione funi portanti	6 mm²	35 mm²	50 mm²	70 mm²
Specifiche commerciali				
Numero di tariffa doganale	85359000			
paese di origine	CH	indeterminato	CH	
Specificazione logistica				
Chilo / pezzo	0.9 kg	0.91 kg		

	615.194.104
ferroviaria prodotto nome	S100
Diametro funi portanti	12 mm
Sezione funi portanti	100 mm ²
Specifiche commerciali	
Numero di tariffa doganale	85359000
paese di origine	CH
Specificazione logistica	
Chilo / pezzo	0.9 kg

