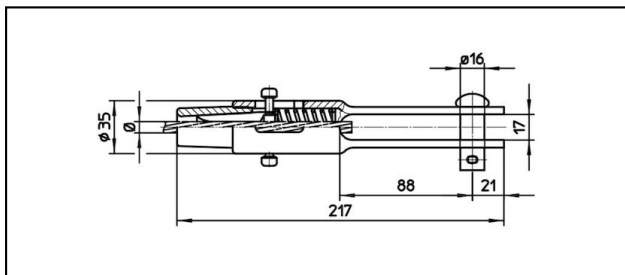
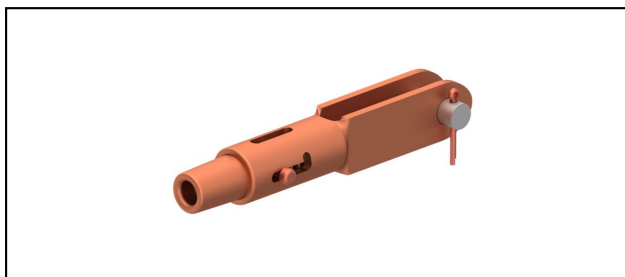


## Morse di amarro

## ■ GCL217/17 Spc.

**Applicazione**

Conduttori in Cu, Cu-acciaio o Bz sottoposti a tiro meccanico

**Caratteristiche**

Carico di esercizio min. 3 kN / max. 25 kN

Carico di rottura del corpo min. 80 kN

**Materiale**

Corpo CuNiSi / Cono AlBz o CuNiSi

**Legenda**

1) Con copiglia in Cu

| Rif. Articolo |  |  |  |  |  |  |  |  |  |
|---------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 615.117.102   | F5                                                                                | 8.9                                                                               | 50                                                                                |  |  |  |  | 0.86                                                                                | 1                                                                                   |
| 615.120.103   | F7                                                                                | 9.8                                                                               | 70                                                                                |  |  |  |  | 0.86                                                                                | 1                                                                                   |
| 615.122.150   | F8                                                                                | 10.8                                                                              | 80                                                                                |  |  |  |  | 0.86                                                                                | 1                                                                                   |
| 615.118.151   | F10                                                                               | 12                                                                                | 100                                                                               |  |  |  |  | 0.85                                                                                | 1                                                                                   |

Specifiche tecnici: **GCL217/17 Spc.**

|                            |             |             |             |             |
|----------------------------|-------------|-------------|-------------|-------------|
|                            | 615.117.102 | 615.120.103 | 615.122.150 | 615.118.151 |
| ferroviaria prodotto nome  | F5          | F7          | F8          | F10         |
| Diametro funi portanti     | 8.9 mm      | 9.8 mm      | 10.8 mm     | 12 mm       |
| Sezione funi portanti      | 50 mm²      | 70 mm²      | 80 mm²      | 100 mm²     |
| Specifiche commerciali     |             |             |             |             |
| Numero di tariffa doganale | 85359000    |             |             |             |
| paese di origine           | CH          |             |             |             |
| Specificazione logistica   |             |             |             |             |
| Chilo / pezzo              | 0.86 kg     |             |             | 0.85 kg     |

