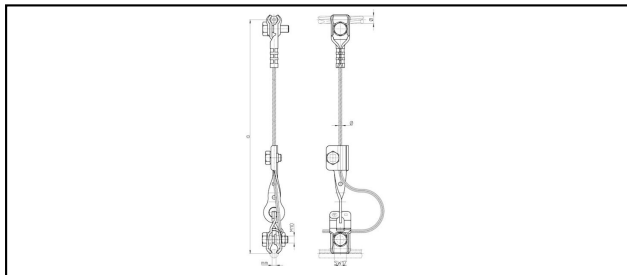


Pendini

SHZR

**Applicazione**

Sospensione per filo di contatto, equipotenziale

Caratteristiche

Diverse lunghezze e sagomature del filo su richiesta

Materiale

Morsetto in CuNiSi/Inox, parte regolabile Inox, Cordino in Cu

Rif. Articolo									
625.628.016	50 - 95	9 - 12.5	10	4.5	3	1600			0.465
625.628.022	50 - 95	9 - 12.5	10	4.5	3	2200			0.521
625.628.028	50 - 95	9 - 12.5	10	4.5	3	2800			0.577
625.628.040	50 - 95	9 - 12.5	10	4.5	3	4000			0.688

Specifiche tecnici: **SHZR**

	625.628.016	625.628.022	625.628.028	625.628.040
Sezione funi portanti	50 - 95 mm²			
Diametro funi portanti	9 - 12.5 mm			
Sezione del filo di sospensione	10 mm²			
Lunghezza a	1600 mm	2200 mm	2800 mm	4000 mm
Diametro del filo di sospensione	4.5 mm			
Forza di slittamento	3 kN			
Specifiche commerciali				
Numero di tariffa doganale	85359000		0	
paese di origine	CH		indeterminato	
Specificazione logistica				
Chilo / pezzo	0.465 kg	0.521 kg	0.577 kg	0.688 kg

