


Pendini

SHTF5,1/10V

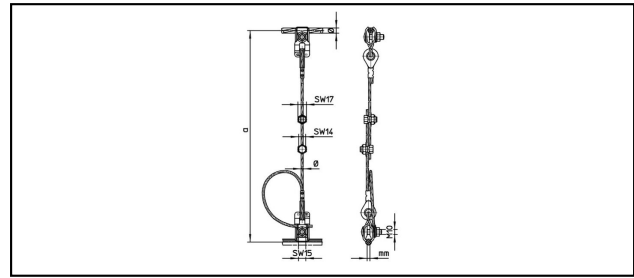

**Applicazione**  
Sospensione per filo di contatto, non equipotenziale

**Materiale**  
Morsetto in CuNiSi / Cordino in Bz 2 / Redancia in plastica

| Rif. Articolo |  |  |  |  |  |  |  |  |  |
|---------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|--|
| 625.590.201   | 9 - 13                                                                            | 50 - 95                                                                           | 5.5 - 7                                                                           | 4.5                                                                               | 10                                                                                | 3                                                                                   | 750 - 2300                                                                          |  |  |
| 625.590.203   | 9 - 13                                                                            | 50 - 95                                                                           | 5.5 - 7                                                                           | 4.5                                                                               | 10                                                                                | 3                                                                                   | 750 - 2300                                                                          |  |  |
| 625.590.204   | 9 - 13                                                                            | 50 - 95                                                                           | 5.5 - 7                                                                           | 4.5                                                                               | 10                                                                                | 3                                                                                   | 750 - 2300                                                                          |  |  |



Specifiche tecnici: **SHTF5,1/10V**

|                                  | 625.590.201   | 625.590.203 | 625.590.204 |
|----------------------------------|---------------|-------------|-------------|
| Diametro funi portanti           | 9 - 13 mm     |             |             |
| Sezione funi portanti            | 50 - 95 mm²   |             |             |
| Sagomatura filo di contatto      | 5.5 - 7 mm    |             |             |
| Diametro del filo di sospensione | 4.5 mm        |             |             |
| Sezione del filo di sospensione  | 10 mm²        |             |             |
| Forza di slittamento             | 3 kN          |             |             |
| Lunghezza a                      | 750 - 2300 mm |             |             |
| Specifiche commerciali           |               |             |             |
| Numero di tariffa doganale       | 85359000      |             |             |
| paese di origine                 | indeterminato | CH          |             |

