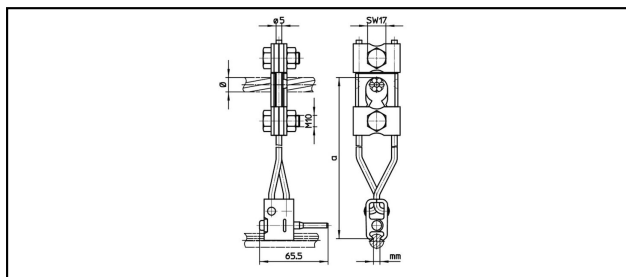


Pendini di filo

■ **DHF9H** Pendino regolabili con fermo d'arresto**Applicazione**

Sospensione per filo di contatto, non equipotenziale

Caratteristiche

Coppia di serraggio 12-15 Nm

Materiale

Corpo CuNiSi / Filo Cu

Rif. Articolo									
625.519.000	50 - 150	9 - 15.7	5.6	5	125 - 285				0.38
625.518.000	50 - 150	9 - 15.7	5.6	5	125 - 485				0.45
625.510.000	50 - 150	9 - 15.7	5.6	5	125 - 750				0.547
625.403.732	50 - 150	9 - 15.7	5.6	5	125 - 1500				0.81

Specifiche tecnici: **Pendino regolabili con fermo d'arresto DHF9H**

	625.519.000	625.518.000	625.510.000	625.403.732
Lunghezza a	125 - 285 mm	125 - 485 mm	125 - 750 mm	125 - 1500 mm
Sezione funi portanti	50 - 150 mm²			
Diametro funi portanti	9 - 15.7 mm			
Sagomatura filo di contatto	5.6 mm			
Forza di slittamento	5 kN			
Specifiche commerciali				
Numero di tariffa doganale	85359000			
paese di origine	CH			
Specificazione logistica				
Chilo / pezzo	0.38 kg	0.45 kg	0.547 kg	0.81 kg

